



MEASUREMENT & CONTROL

## Solutions for analysis & management for installations





# Solutions for analysis & management for installations

Having information is essential to know, be aware of and take actions that lower energy costs and improve the operations of facilities.

By installing power analyzers, you can determine how, where, when and how much energy you are consuming in your installation. Once connected to the management software, you can track your consumption over time. This will make it possible to view consumption trends and identify areas of improvement so that you can apply corrective measures, assess their benefits and quickly detect any abnormal or inefficient consumption.

Analyzers provide relevant information about the quality of your installation by measuring the level of harmonics, which you can use to determine if they can cause problems in your installation. With this information, you can find the most suitable solution to mitigate harmonics and the effects they have on the loads and elements of your installation.

What are the benefits of installing power analyzers?

- | Manage energy consumption (electricity, water or gas)
- | Track and reduce unnecessary or inefficient consumption
- | Avoid reactive energy or maximum demand penalties
- | Detect problems due to the presence of harmonics.

By using the **PowerStudio** Energy Management Software (EMS), you will be able to easily conduct a continuous energy audit of your system and comply with the goals set out in the **ISO 50001** international standard.

## ENERGY MEASUREMENT AND MANAGEMENT

# Power analyzers

AVAILABLE IN TWO FORMATS

### DIN rail



### Panel



CVM power analyzers with expansion modules.

## KEY FEATURES

### Installation in DIN Rail or Panel

A wide range of devices in different formats for installing on any type of surface.

### Control with inputs/outputs

Circutor analyzers have inputs for reading pulses from different energy sources or for checking a status (sensors, protection devices, etc.), and outputs for generating alarms for any instantaneous parameter.

### Power quality management

Monitors power quality as per IEC 61000-4-30, detects and records voltage events (Overvoltages, dips and interruptions), transients and monitors the CBEMA, ITIC and SEMIF47 curves.

### Solutions for Medium and Low Voltage

Especially designed to be connected in any type of power network, whether Low or Medium Voltage, adapting to the needs of each installation.

### Communications

Can be integrated into communication systems in different ways, such as RS-485, Ethernet or Wi-Fi with various protocols available.

### Compliant with the ISO 50001 Standard

Devices adapted to the requirements specified in the standard, recording any type of energy consumption, from any source, separated by tariffs, type of use or zone.



Flexible sensors to measure current (FLEX).



Expandable with multiple inputs/outputs

### Version with EMSi system **NEW**

New complete range of self-detectable **Line** devices. Easy set-up without the need to connect power supply or communications cables.

### Calculate financial costs

The analyzers show the cost associated with any type of energy consumption, both general and that associated with production processes.

### Energy Efficiency Measures

Monitor data to improve energy efficiency and environmental management. Circutor devices show CO<sub>2</sub> emissions, adapting to the agreements established to preserve the environment.

### FLEX versions

Devices that can be installed without the need to interrupt or shut off the electrical supply, thanks to the use of **FLEX** flexible clamps.

### Modular and expandable solutions

Grow your measurement equipment by adding new features, thanks to expansion modules that are connected in the same enclosure.

### Free Test Report Center


Download your test reports of Circutor analyzers for free from [testreport.circutor.com](http://testreport.circutor.com)



ENERGY MEASUREMENT AND MANAGEMENT

# Power analyzers for any point in the installation

## WHERE TO INSTALL THE ANALYZERS

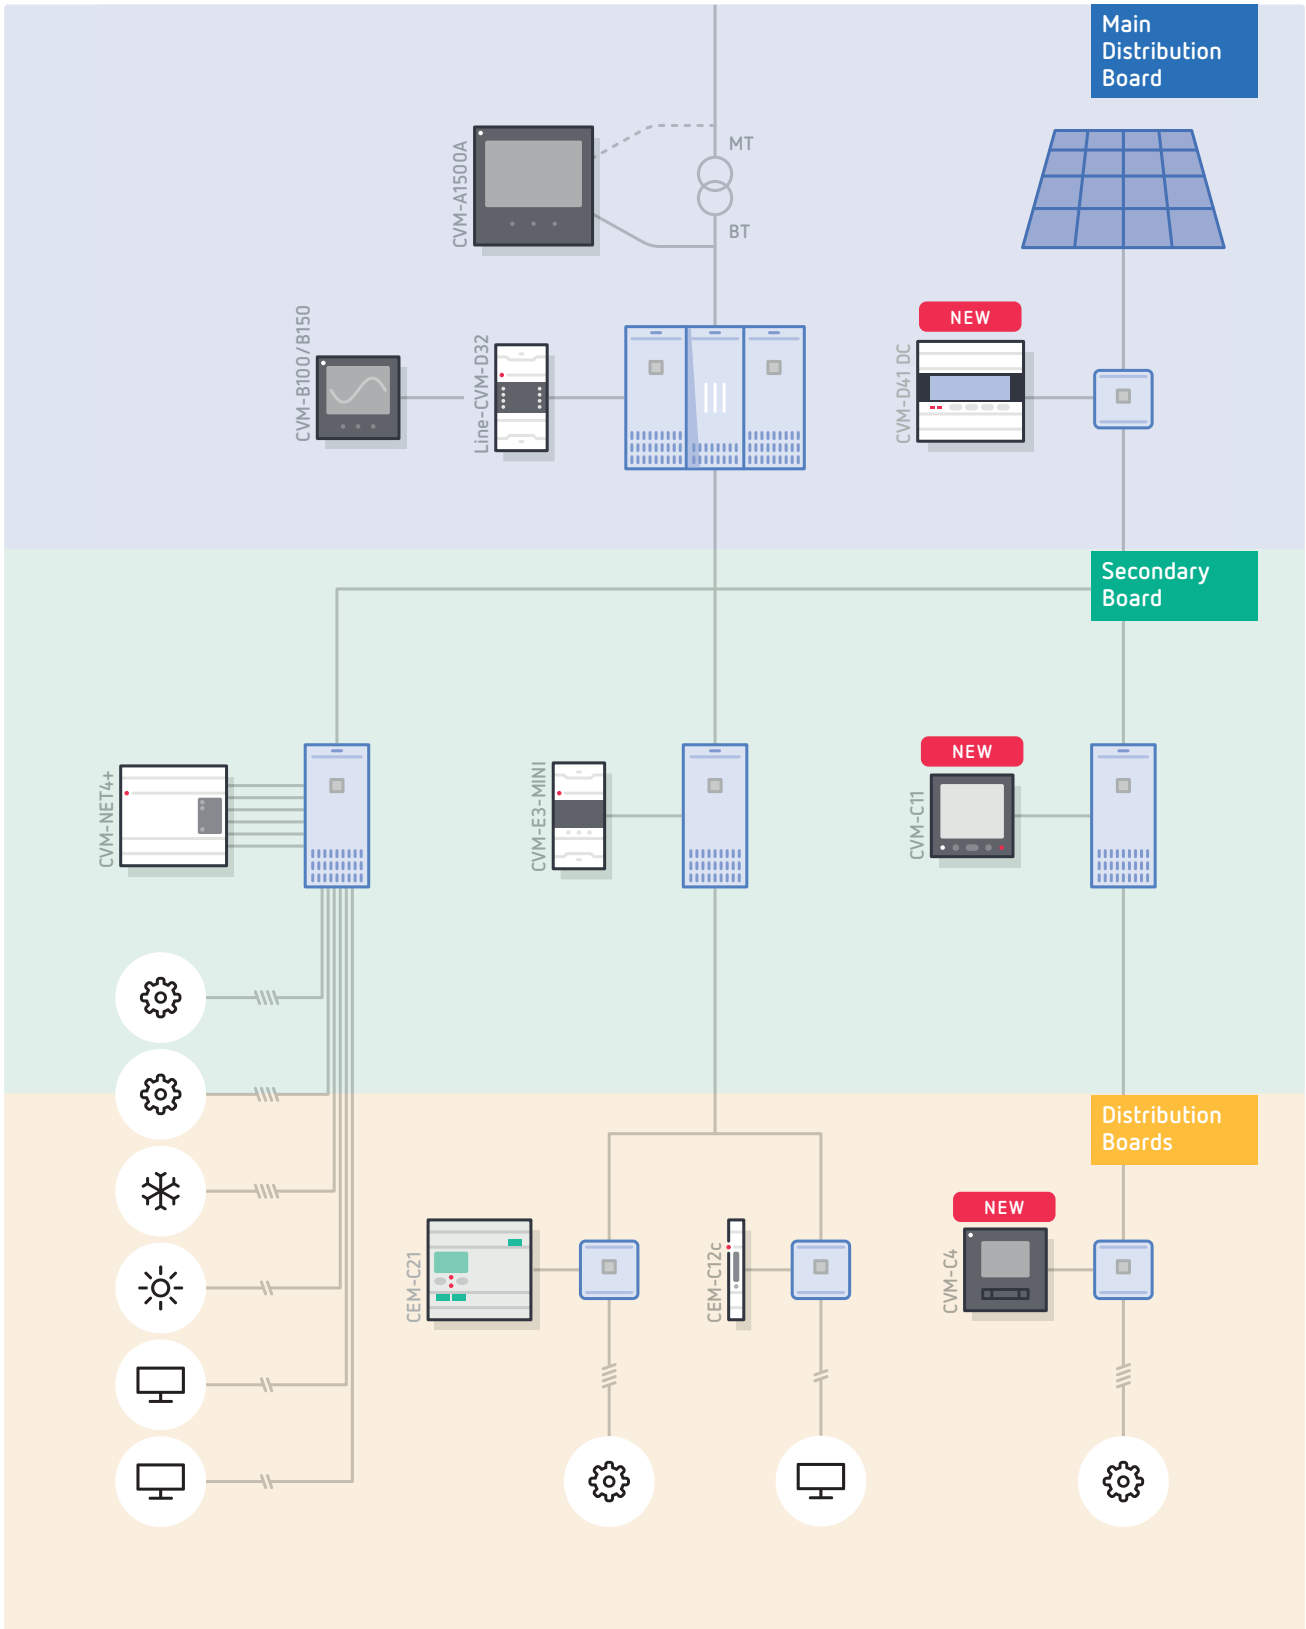

ENERGY MEASUREMENT AND MANAGEMENT

Full range of power analyzers

QUICK SELECTION

Installation in PANEL

Three-phase with indirect connection									
96x96 mm					144x144 mm				
ITF (.../5 A; .../1 A)	ITF (.../5 A; ... /1 A)	MC (.../250 mA)	FLEX sensors	ITF (.../5 A; .../1 A) + MC (.../250 mA)				FLEX sensors	
Modbus RTU	Modbus RTU / BACnet			Modbus RTU / BACnet / Webserver / HTML5 / XML					
RS-485					Ethernet (Web server) + RS-485				
2 Digital outputs + 2 Relay outputs + 2 Digital inputs									
-	Neutral current + 31 <sup>st</sup> harmonics	31 <sup>st</sup> harmonics		Neutral current + 50 <sup>th</sup> harmonics		Neutral current + 63 <sup>rd</sup> harmonics			
					Power quality				
					Expandable				
					Datalogger (optional)		Datalogger		



<b>CVM-C4</b>	<b>CVM-C11</b>	<b>CVM-C10</b>	<b>CVM-C10</b>	<b>CVM-B100</b>	<b>CVM-B150</b>	<b>CVM-A1500</b>	<b>CVM-A1500A</b>	<b>CVM-A1500</b>	<b>CVM-A1500A</b>
-ITF-485-ICT2	-ITF-IN-485-ICT2	-MC-485-ICT2	-FLEX-IN-485-12	-ITF-485-ICT2	-ITF-485-ICT2	-ITF-485-ICT2	-ITF-485-ICT2	-FLEX-485-ICT2	-FLEX-485-ICT2

DIN rail installation

AC networks								DC networks	
Direct single-phase	Direct three-phase		Indirect three-phase				Single-phase (12) Three-phase (4)	Indirect single-phase	
Direct 100 A	Direct 65 A		ITF (.../5 A; .../1 A) or MC (.../250 mA)	FLEX sensors	ITF (.../5 A; .../1 A) or MC (.../250 mA)	FLEX sensors	ITF (.../5 A; .../1 A) or MC (.../250 mA)	MC (.../250 mA)	Shunt (DC)
Modbus RTU	-	Modbus RTU	Modbus RTU / BACnet		Modbus TCP		Modbus RTU		
RS-485	-		RS-485		Ethernet / Wi-Fi		RS-485		
-	1 Digital output		1 Digital output + 1 Digital input		-		2 Digital outputs		4 Digital outputs + 1 Analogue output + 2 digital inputs
					Expandable - BUS Line				
					31 <sup>st</sup> harmonics		40 <sup>th</sup> harmonics		15 <sup>th</sup> harmonics



<b>CEM-C12c</b>	<b>CEM-C21</b>		<b>CVM-E3-MINI</b>				<b>Line-CVM-D32</b>	<b>CVM-NET</b>	<b>CVM-NET4+</b>	<b>CVM-D41 DC</b>
CEM-C12c	-T1	-485- T1	-ITF-485-IC -MC-485-IC	-FLEX-485-IC	-ITF-WiEth -MC-WiEth	-FLEX-WiEth	Line-CVM-D32	-ITF-485-C2	-ITFMC- RS485-C4	- DC mA -DC V


ENERGY MEASUREMENT AND MANAGEMENT


Power analyzers for AC networks


### CVM-A1500


Power quality analyzer


- Class A certificate as per IEC 61000-4-30
- EN 50160 Analysis
- Logging of events and transients
- Class 0.2S in active energy
- .../5 A; .../1 A; .../250 mA or FLEX
- Memory (1 year of data)
- EMS software with integrated web server
- Up to 3 expansion modules





  
144 x 144


  
2 digital outputs


  
2 relay outputs


  
2 digital inputs


  
RS-485 Modbus

  
RS-485 BACnet

  
Ethernet Modbus

  
Datalogger

  
Wave form


  
Flex optional


NEW


### CVM-C11


Power analyzer


- Up to 400 variables
- Class 0.5S in active energy
- .../5 A; .../1 A
- Neutral current
- 3 tariffs
- RS-485 (Modbus/BACnet)
- Up to 31<sup>st</sup> harmonic





  
96 x 96

  
2 digital outputs

  
2 relay outputs

  
2 digital inputs

  
RS-485 Modbus

  
RS-485 BACnet

### CVM-B100/150

Power analyzers, high performance

- Over 500 variables
- Class 0.5S in active energy
- .../5 A; .../1 A; .../250 mA
- Up to 50<sup>th</sup> harmonic
- Custom made screens
- Up to 4 expansion modules
- Neutral current



  
96 x 96 B100

  
144 x 144 B150

  
2 digital outputs

  
2 relay outputs

  
2 digital inputs

  
RS-485 Modbus

  
RS-485 BACnet


  
Modular


  
Ethernet optional


### CVM-C10


Power analyzer


- Up to 400 variables
- Class 0.5S in active energy
- .../250 mA or FLEX
- Neutral current
- RS-485 (Modbus/BACnet)
- Up to 31<sup>st</sup> harmonic





  
96 x 96


  
2 digital outputs

  
2 relay outputs

  
2 digital inputs


  
RS-485 Modbus

  
RS-485 BACnet

  
Flex optional

### M-CVM-AB

Expansion modules for CVM-A/CVM-B analyzers

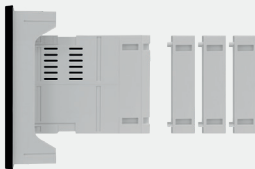


- M-CVM-AB-8I-80TR → 8 digital inputs + 8 digital outputs
- M-CVM-AB-8I-80R → 8 digital inputs + 8 relay outputs
- M-CVM-AB-4AI-8AO → 4 analogue inputs + 8 analogue outputs (0/4...20mA)
- M-CVM-B-DATALOGGER → Integrated EMS software + 1 year memory
- M-CVM-AB-Modbus-TCP (bridge) → Ethernet Gateway + RS-485 (bridge)
- M-CVM-AB-Modbus-TCP (switch) → Ethernet Gateway for loop between analyzers
- M-CVM-AB-MBUS → M-BUS Communications
- M-CVM-AB-LonWorks → LonWorks Communications
- M-CVM-AB-Profibus → Profibus Communications


NEW


### CVM-C4


Power analyzer


- Up to 230 variables
- Class 0.5S in active energy
- .../5 A; .../1 A
- RS-485 (Modbus)
- Total harmonic distortion (THD%)




  
96 x 96

  
2 digital outputs

  
2 relay outputs

  
2 digital inputs

  
RS-485 Modbus

ENERGY MEASUREMENT AND MANAGEMENT

**Power analyzers for AC networks**



ENERGY MEASUREMENT AND MANAGEMENT

**Power analyzers for DC networks**





ENERGY MEASUREMENT AND MANAGEMENT

Power analyzers for AC networks

### CVM-E3-MINI

Power analyzer

- Up to 400 variables
- Class 1 in active energy
- .../5 A; .../1 A or .../250 mA or FLEX
- Up to 31<sup>st</sup> harmonic



  
 3 modules  
DIN rail

  
 RS-485  
Modbus

  
 RS-485  
BACnet

  
 1 transistor  
output

  
 1 digital  
input

  
 Flex  
optional



### CVM-E3-MINI-WiEth

Power analyzer

- Up to 400 variables
- Class 1 in active energy
- .../5 A; .../1 A or .../250 mA or FLEX
- Up to 31<sup>st</sup> harmonic



  
 3 modules  
DIN rail

  
 Wi-Fi

  
 Modbus  
TCP


  
 Flex  
optional





### Line CVM-D32


Power analyzer


- Up to 500 variables
- Class 1 in active energy
- .../5 A; .../1 A or .../250 mA
- Up to 40<sup>th</sup> harmonic
- Event counter
- I/O expandable




  
 3 modules  
DIN rail

  
 2 digital  
outputs

  
 RS-485  
Modbus


  
 Bus  
Line




### Line-M

Expansion modules for Line-CVM-D32

- Line-M-410-R → 4 digital inputs + 4 relay outputs
- Line-M-8160 → 8 digital inputs + 6 relay outputs
- Line-M-410-T → 4 digital inputs + 4 digital transistor outputs
- Line-M-410-RV → 4 digital inputs (voltage) + 4 relay outputs
- Line-M-410-A → 4 analogue inputs + 4 analogue outputs





  
 Bus  
Line


### CVM-NET4+


Multi-channel power analyzers

- 4 three-phase or 12 single-phase channels
- Up to 230 variables per channel
- Class 1 in active energy
- .../250 mA



  
 6 modules  
DIN rail


  
 4 digital  
outputs


  
 RS-485  
Modbus


### CVM-NET


Power analyzer

- Up to 230 variables
- Class 1 in active energy
- .../5 A; .../250 mA



  
 3 modules  
DIN rail

  
 2 digital  
outputs

  
 RS-485  
Modbus

ENERGY MEASUREMENT AND MANAGEMENT

**Measurement transformers**



ENERGY MEASUREMENT AND MANAGEMENT


**Accessories for communications**



ENERGY MEASUREMENT AND MANAGEMENT

Power analyzers for AC networks

**CEM-C21**  
Energy meter with analysis of electrical variables



- Direct three-phase measurement
- 65 A
- 3x 230 V/400 V
- Class 1 in active energy (IEC 62053-21)
- Class 2 in reactive energy (IEC 62053-23)
- V, A, kW, kvar, kWh, Kvarh, Hz, CO<sub>2</sub>, energy cost

3 modules DIN rail

1 dual-tariff input (DS)


1 digital output (T1)

RS-485 Modbus

IEC

MID

**CEM-C12c-MID** NEW  
Energy meter with analysis of electrical variables




- Direct single-phase measurement
- 100 A
- 1x 230 V
- Class 1 in active energy (IEC 62053-21)
- Class 2 in reactive energy (IEC 62053-23)
- V, A, kW, kvar, kWh, kvarh, Hz, CO<sub>2</sub>, energy cost

1 module DIN rail

RS-485 Modbus

IEC


MID



ENERGY MEASUREMENT AND MANAGEMENT

Power analyzers for DC networks

**CVM-D41** NEW  
Power analyzers



- Direct three-phase voltage measurement up to 1500 Vdc
- Up to 600 mV (via Shunt)
- Class 1 in active energy
- V, A, kW, kWh (DC)
- Analogue output (0/4... 20 mA or 0/2... 10 V)


6 modules DIN rail

2 relay outputs (alarm)


2 digital inputs

1 analogue output

RS-485 Modbus



**SH**  
Shunts for measuring direct current




- From 1 A to 20,000 A
- 0.5 or 1 accuracy
- Secondary.../60 mV
- Other secondary on demand (from.../50 mV to 600 mV)

ENERGY MEASUREMENT AND MANAGEMENT

Accessories for communications

**Line-TCPRS1**  
RS-232/RS-485 to Ethernet/Wi-Fi converter



- RS-232 or RS-485 to Ethernet/Wi-Fi
- Settings from app and web server
- Bus-Line connection (Up to 8 devices)
- 32 devices via the RS-485

3 modules DIN rail

RS-232 Modbus

RS-485 Modbus


Ethernet Modbus TCP

Ethernet TCP

Ethernet UDP

Bus Line

**TCPRS1+**  
RS-485 to Ethernet/Wi-Fi converter



- RS-485 to Ethernet/Wi-Fi
- Settings from app and web server
- 32 devices via RS-485

2 modules DIN rail

RS-485 Modbus

Ethernet Modbus TCP

Ethernet TCP

Ethernet UDP


## ENERGY MEASUREMENT AND MANAGEMENT

## Current transformers to analyze AC networks

## TD

## Closed-core transformers

- From 40 A to 4000 A
- .../5 A ; .../1 A or.../250 mA
- DIN connection
- Panel or busbar/cable
- Sealable
- Flange fastening
- Encapsulated (optional)
- Low losses



## TQ

## Open-core transformers

- From 100 A to 1000 A
- .../5 A ; .../1 A or.../250 mA
- DIN connection/Panel or busbar/cable
- Button release to open
- Sealable
- Low losses



## MC1

## Efficient single-phase transformers

- Single-phase connection
- From 50 A to 2000 A
- Diameter from 20 mm to 80 mm
- .../250 mA
- Triple scale
- Small size



## MC3

## Efficient three-phase transformers

- Three-phase connection
- From 63 A to 250 A
- Diameters (7.1/14.6/26 mm)
- .../250 mA
- Easy installation
- Optimized space




## ENERGY MEASUREMENT AND MANAGEMENT

## Software

## Line-EDS-iMonitor

Integrated solution for monitoring consumptions and photovoltaic generation for facilities and public administrations

- Instantaneous power graph: Network demand, generation and consumption
- Instantaneous power graph per load or type of consumption
- Energy accumulated during the current month
- Consumption graph in user-adjustable period
- Power trend graph (last 24h, day, week, month or year)
- Instantaneous solar radiation
- Outside temperature
- Weather forecast
- Monthly savings
- Lower CO<sub>2</sub> emissions
- Interactive images of the installation
- Export dashboards to corporate website
- Monitor consumption and status of electric vehicle chargers.

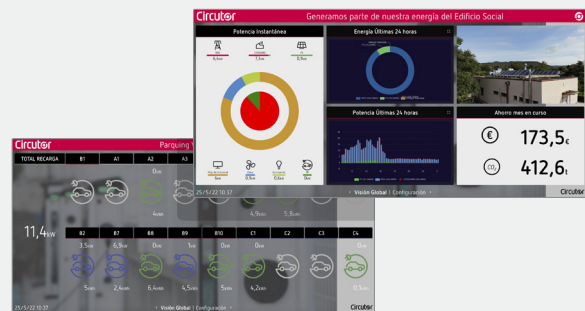


## PowerStudio SCADA

## Energy Management Software

Data control and acquisition system with real-time monitoring, reporting, alarm management and SCADA interface to create simple diagrams. The main features are as follows:

- Creation of databases
- Event log
- Energy cost management
- Energy balance
- Energy consumption ratio
- Consumption reports
- Alarm tables
- Energy quality management
- Compatible with other SCADA programs on the market
- Analysis and management of variables
- Energy/production ratio
- Cost/production ratio
- Essential tool for the ISO 50001 certification.

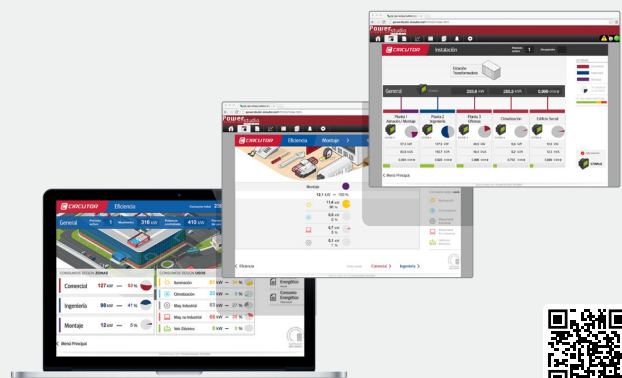

**Circutor**

Vial Sant Jordi, s/n  
08232 Viladecavalls  
Barcelona (Spain)  
t. +34. 93 745 29 00  
info@circutor.com

PDF



C2M5G3.

CIRCUTOR, SAU reserves the right to modify any information contained in this catalogue.